

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 987 711 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.03.2000 Bulletin 2000/12

(51) Int Cl.7: G11B 27/28

(21) Application number: 99307399.8

(22) Date of filing: 17.09.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Sekii, Yasuaki, c/o Sony Corp.
Tokyo (JP)

(74) Representative: Ayers, Martyn Lewis Stanley
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)

(30) Priority: 18.09.1998 JP 26527898

(71) Applicant: SONY CORPORATION
Tokyo (JP)

(54) Reproduction method and reproduction apparatus

(57) This invention relates to a reproduction method and also to a reproduction apparatus adapted to transmit a first digital signal for main data of a piece of music and additional data accompanying the main data and

including the number of the piece of music and the elapsed time on the track and a second digital signal for main data of the piece of music and accompanying absolute time data on a common digital interface.

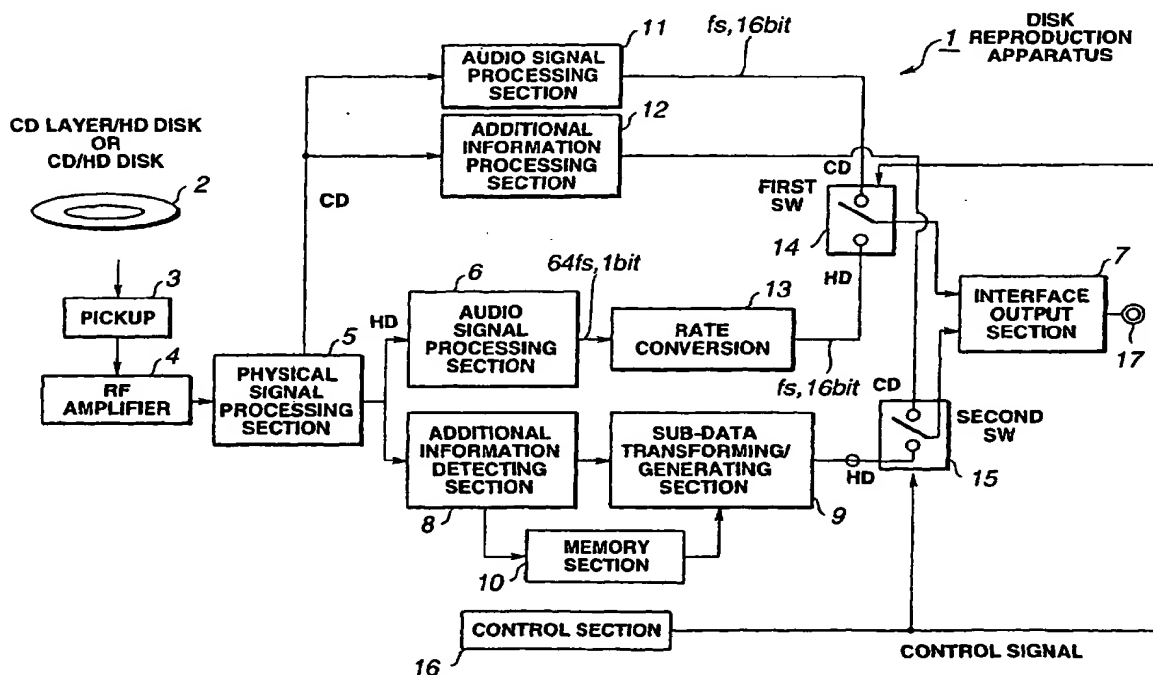


FIG.1

EP 0 987 711 A2

Description

[0001] This invention relates to a reproduction method and also to a reproduction apparatus adapted to transmit a first digital signal for main data of a piece of music and additional data accompanying the main data and including the number of the piece of music and the elapsed time on the track and a second digital signal for main data of the piece of music and accompanying absolute time data on a common digital interface.

[0002] The digital audio interface output of known compact disk (CD) players is adapted to produce, in addition to main data that are digital audio data, channel status data including a category code for identifying the CD category of the CD disk to be played and user data comprising Q codes, each including a track number and the elapsed time of a piece of music on the track.

[0003] On the other hand, many known digital recording apparatus using a digital audio tape (DAT) or a mini-disk (MD) as recording medium are designed to automatically record start IDs and track numbers on the recording medium for a great convenience of the user on the basis of the CD category identified by decoding the channel status data and the sub-data including the track numbers and the elapsed time of each piece of music recorded on the CD to be replayed as detected by decoding the Q code of the user data when receiving data from the CD player by way of the digital audio interface.

[0004] Meanwhile, in recent years, standards for optical disks that are different from known CDs and adapted to record high speed 1-bit digital audio signals for music have been proposed. Audio data addressed by the proposed standards are 1-bit audio signals obtained by subjecting corresponding analog audio signals to a delta-sigma ($\Delta\Sigma$) modulation process. A 1-bit audio signal is sampled with a very high sampling frequency that is 64 times as high as the sampling frequency of 44.1 KHz of ordinary CDs. The signal is expressed in terms of a very high sampling frequency and a data word length with a very small number of quantization bits and hence characterized by a wide transmission frequency band. Additionally, due to the $\Delta\Sigma$ modulation, it can secure a wide dynamic range in the audio band that is a low frequency band relative to the over-sampling frequency that is 64 times as high as the sampling frequency of ordinary CDs.

[0005] An optical disk deals with high speed 1-bit audio signals conforming to the proposed standards for new digital audio signals and shows audio characteristics by far more excellent than those of known CDs. However, a recording system totally different from that of known CDs has to be used for it and hence is not compatible with known CDs in terms of information on the track numbers and the elapsed time of each piece of music as contained in the sub-data as well as other data.

[0006] Therefore, when producing a digital audio interface output in a disk replaying apparatus adapted to

digital audio signals conforming to the proposed new standards, the category code of the channel status data, the user data and other data generally have to be newly defined and managed.

[0007] However, the use of such newly defined data is totally detrimental to the above identified convenience of recording start IDs and track numbers on the recording medium when the data are recorded by way of the digital interface to a known digital recording apparatus.

[0008] Particularly, with a reproduction apparatus adapted to both digital audio disks conforming to the new standards and existing CDs, there arises a confusing situation where the above convenience is available when replaying a CD whereas it is not available when replaying a new disk to a great inconvenience on the part of the user of the apparatus.

[0009] According to an aspect of the invention, there is provided a reproduction apparatus adapted to selectively replaying a first recording medium having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers; and

a second recording medium having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area;

said reproduction apparatus comprising:

a reproduction means for replaying the control area and the program area of said second recording medium;

a memory means for storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second recording medium and replayed by said reproduction means;

a sub-data generation means for generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second recording medium by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and

an interface output means for receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first recording medium when replaying said first recording medium and receiving the passed-by addresses and the program number of the program currently being reproduced as generated by said sub-data generation means, trans-

forming them and outputting them to a predetermined digital interface when replaying said second recording medium.

[0010] According to another aspect of the invention, there is provided a reproduction apparatus adapted to selectively replaying a first layer having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers and a second layer having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area;

said reproduction apparatus comprising:

a reproduction means for selectively replaying the program area of said first layer and the control area and the program area of said second layer;

a memory means for storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second layer and replayed by said reproduction means;

a sub-data generation means for generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second layer by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and

an interface output means for receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first layer when replaying said first layer and receiving the passed-by addresses and the program number of the program currently being reproduced as generated by said sub-data generation means, transforming them and outputting them to a predetermined digital interface when replaying said second layer.

[0011] The hereinafter described embodiments of the present invention can provide a reproduction method and a reproduction apparatus adapted to use channel status data and user data in the format equivalent to that of CDs for the digital audio interface output when replaying a disk for digital audio signals recorded with a system different from that of CDs so that the convenience of automatically recording start IDs and track numbers on the digital recording medium such as DAT or mini-disk can be ensured as in the case of a CD.

[0012] The hereinafter described embodiments of the present invention can provide a reproduction apparatus and a reproduction method adapted to use channel status data and user data in the format equivalent to that of CDs for the digital audio interface output particularly in the case of a reproduction apparatus adapted to both digital audio disks conforming to the new standards and existing CDs.

[0013] Now, preferred embodiments of reproduction apparatus and reproduction method according to the present invention will be described by way of non-limitative example with reference to the accompanying drawings in which:-

[0014] FIG. 1 is a schematic block diagram of a disk replaying apparatus embodied according to the invention.

[0015] FIG. 2 is a schematic illustration of the data structure of a sub-coding frame format applicable to known CDs.

[0016] FIG. 3 is a schematic illustration of the frame data structure of a Q data applicable to known CDs.

[0017] FIG. 4 is a schematic illustration of the frame data structure of a Q data in a program area applicable to known CDs.

[0018] FIG. 5 is a schematic illustration of the data structure of a sub-frame conforming to the Digital Audio Interface Standards.

[0019] FIG. 6 is a schematic illustration of the data structure of a frame conforming to the Digital Audio Interface Standards.

[0020] FIG. 7 is a schematic illustration of the data structure of channel status data.

[0021] FIG. 8 is a schematic illustration of the data structure of user data when the category of channel status data indicates the CD category.

[0022] FIG. 9 is a schematic illustration of the data structure when a sub-frame conforming to the Digital Audio Interface Standards is used as user data.

[0023] FIG. 10 is a schematic illustration of the data structure when a sub-frame conforming to the Digital Audio Interface Standards is used as channel status data.

[0024] FIG. 11A is a schematic illustration of the data structure of an HD disk applicable to the present invention. FIG. 11B is a detailed illustration of the data structure of area TOC shown in FIG. 11A.

[0025] FIG. 11C is a detailed illustration of the data structure of the track area shown in FIG. 11A.

[0026] FIG. 11D is a detailed illustration of the data structure of each track of the track area shown in FIG. 11A.

[0027] FIG. 12 is an illustration of the data table that may be recorded in the track list in an area TOC data.

[0028] FIG. 13 is an illustration of the data table that may be recorded in the index list in an area TOC data.

[0029] FIG. 14 is an illustration of the data table of an audio header in the audio sector of each track.

[0030] FIG. 15 is an illustration of the data table of

frame info in the audio header of each track.

[0031] FIG. 16 is a specific example of table of the track list and the index list in an area TOC data.

[0032] FIG. 17 is a schematic illustration of the data structure of a sub-Q-data.

[0033] FIG. 18 is a flow chart of the operation of generating track numbers, index numbers and elapsed time that can be used for the purpose of the invention.

[0034] FIG. 19 is a schematic illustration of the data structure indicating track numbers, index numbers and start times that can be actually generated on the basis of the table of FIG. 16.

[0035] FIG. 20 is a flow chart of the processing procedure according to the invention.

[0036] The embodiment of reproduction apparatus according to the invention as described hereinafter is adapted to replay music from a compact disk (CD) and also from a novel optical disk storing high speed 1-bit digital audio signals and also output audio signals conforming to the Digital Audio Interface Standards. An optical disk of the new type storing high speed 1-bit digital audio signals will be referred to as an HD (high definition) disk hereinafter.

[0037] Each high speed 1-bit audio signal recorded on an HD disk is obtained by means of delta-sigma ($\Delta\Sigma$) modulation of an analog audio signal and has a data format of a data word length of 1-bit and a sampling frequency of 2,8224MHz ($44.1\text{KHz} \times 64$).

[0038] FIG. 1 is a schematic block diagram of disk replaying apparatus 1 embodied according to the invention.

[0039] Referring to FIG. 1, optical disk 2 is a multilayer disk comprising a first layer storing multi-bit digital audio signals in the conventional CD format and a second layer storing 1-bit digital audio signals in the new format referred to as the HD format.

[0040] In a different mode of carrying out the invention, a reproduction apparatus may be so arranged as to selectively carry and drive a conventional CD or an hinge device storing 1-bit digital audio signals in the HD format.

[0041] The signal read out from the optical disk 2 by means of optical pickup 3 is input to physical signal detector/processor 5 by way of RF amplifier 4.

[0042] In the case where the optical disk 2 is an HD disk or an HD layer, the physical signal detector/processor 5 carries out an operation of physically processing the signal including EFM plus demodulation, product coding and descrambling and transmits a 1-bit delta-sigma modulated digital audio signal having a sampling frequency of f_s multiplied by 64 ($64 \times 44.1\text{KHz} = 2.8224\text{MHz}$) to audio signal processor 6 and additional information detector/processor 8.

[0043] On the other hand, in the case where the optical disk 2 is a CD, the physical signal detector/processor 5 carries out an operation of physically processing the signal including EFM demodulating and CIRC (cross interleaved Read-Solomon coding) and transmits a digital

audio signal sampled with a sampling frequency of f_s (44.1KHz) and having a quantization bit number of 16 bits to audio signal processor 11 and additional information detector/processor 12.

[0044] The audio signal processor 6 demodulates the 1-bit digital audio signal that is reproduced from the optical disk 2 and sampled with the sampling frequency of f_s multiplied by 64 ($64 \times 44.1\text{KHz} = 2.8224\text{MHz}$) and the rate converter 13 down-converts the 1-bit digital audio signal sampled with the sampling frequency f_s multiplied by 64 ($64 \times 44.1\text{KHz} = 2.8224\text{MHz}$) to a multi-bit digital audio signal having a sampling frequency of f_2 (44.1KHz) and a quantization bit number of 16 bits that are equivalent with those of a CD and transmits it to one of the terminals of first switch 14.

[0045] On the other hand, the additional information detector/processor 11 demodulates the digital audio signal having a quantization bit number of 16 bits that is reproduced from the optical disk 2 and sampled with the sampling frequency of f_s (44.1KHz) and transmits to the other terminal of the first switch 14.

[0046] Then, the multi-bit digital audio signal selected by the first switch 14 is fed to interface output section 7.

[0047] The digital audio interface output section 7 outputs the multi-bit digital signal typically as digital audio interface output conforming to the IEC958 format.

[0048] The additional information detector/processor 8 separates all the information other than the audio signal from the data string containing said 1-bit digital audio signal. More specifically, it detects time information TCP, which will be described hereinafter, from the header information contained in said data string and transmits it to sub-data converter/generator 9. Additionally, it extracts information on the start time of each track and that of each index such as track start time codes and index start time codes from the control information arranged at the head and the trail of said data string and stores the extracted information in memory 10.

[0049] The sub-data converter/generator 9 converts and generates sub-data such as channel status data and user data that conform to the Digital Interface Standards on CDs by means of said time information TCP fed from the additional information detector/processor and said track start time information and index start time information stored in said memory 10.

[0050] The sub-data generates by the sub-data converter/generator 9 such as channel status data and user data to one of the terminals of second switch 15.

[0051] On the other hand, the additional information detector/processor 12 separates all the information other than the audio signal from the data string containing said multi-bit digital audio signal. Additionally, it extracts information conforming to the Digital Interface Standards on CDs such as channel status data and user data and transmits it to the other terminal of switch 15.

[0052] Then, the sub-data such as channel status data and user data selected by said switch 15 are transmitted to said digital audio interface output section 7 and

synthetically combined with the multi-bit digital audio signal from the audio signal processor 6 or the audio signal processor 11. Then, it outputs the obtained data conforming to the Digital Audio Interface Standards to digital output terminal 1.

[0053] The first switch 14 and the second switch 15 are controlled for their switching operations by a control signal output from the control section 16 on the basis of the outcome of the operation of determining if a CD or an HD or if a CD layer or an HD layer, whichever appropriate, is to be handled.

[0054] Now, sub-data, or channel status data and user data conforming to the CD Standards, that can be converted and generated by the sub-data converter/generator 10 by means of the additional information extracted from the 1-bit digital audio signals from the optical disk 2 will be discussed hereinafter.

[0055] According to the CD Standards, there are sub-data (P, Q, R, S, T, U, V, W) formed on a frame by frame basis that can be read out when the disk is driven for ordinary replay on a track by track basis. FIG. 2 is a schematic illustration of the data structure of a sub-coding frame format of a compact disk audio system (conforming to the IEC (International Electro-technical Commission) 908 Standard). Sub-data P through W are contained in each frame by 98 bits including sync bits S_0 and S_1 for a sync pattern. P represents information on the interval between two pieces on a track and R through W represent information on still pictures and characters. Q represents most of the information converted and generated by the additional information detector/processor 9 including track numbers and the elapsed time on each of the tracks as well as the absolute time (minute, second, frame).

[0056] FIG. 3 shows a format applicable to a Q code. The 96 bits other than the sync bits of S_0 and S_1 include 4 CONTROL bits indicating the presence or absence of emphasis and if copying the piece is permitted or prohibited, 4 address (ADR) bits indicating the data mode, 72 Q data bits and 16 cyclic redundancy check (CRC) bits for the generation of parity check codes. The number of address (ADR) bits will be reduced to 1 when the data in the program area are being reproduced.

[0057] FIG. 4 is a schematic illustration of the frame data structure of a Q data including only an address (ADR) bit. It includes track no TNO, index number X, the elapsed time on the track (minute (MIN), second (SEC), frame (FRAME)), the absolute time (minute (AMIN), second (ASEC), frame (AFRAME)) from the head of the disk and CRC. Note that the elapsed time on the track is that of a track with a specific track number.

[0058] FIG. 5 is a schematic illustration of the data format of a sub-frame conforming to the Digital Audio Interface Standards (IEC 958 Standards). FIG. 6 is a schematic illustration of the data structure of a frame containing sub-frames as shown in FIG. 5.

[0059] The synchronization preamble (Sync Preamble), user data (U bit), channel status data (C bit) and

other data exist in each frame in addition to audio data for the left and right channels.

[0060] FIG. 7 is a schematic illustration of the data format of channel status data. The data contains a category code for identifying the type of apparatus, the sampling frequency f_s and CONTROL bits for indicating the presence or absence of emphasis.

[0061] FIG. 8 is a schematic illustration of the data format of a user data when the category code of FIG. 7 is "10000000", indicating that the signal source is a CD reproduction apparatus. Here, codes Q through W are listed to exclude P code and, particularly, the 96 bits Q code will be extracted therefrom.

[0062] FIG. 9 and FIG. 10 show examples of data including user data (U) and channel status data (C) that can be actually output along with audio data.

[0063] Thus, as described above, a digital output of a CD player contains channel status data indicating the CD category and user data indicating the track number and the elapsed time of the track.

[0064] On the other hand, according to the above described newly established standards for optical disks (typically referred to as Super Audio CD Standards), a start address that corresponds to the absolute time of the start of a track in the audio area is written in Track_List_2 in the area TOC data. Only the time code contained in the initial header of each audio sector that corresponds to the absolute time of the start can be read out during an ordinary operation of reproducing data from a track.

[0065] FIG. 11A is a schematic illustration of the data structure of the audio area on an optical disk conforming to the Standards, where each of the two area TOCs arranged on the opposite sides of the track area has a configuration as shown in FIG. 11B. Track_Start_Time_Code of each track is described in Track_List_2 in the area TOC as shown in the syntax of FIG. 12. Index start time code Index_Start_TC of each index number as shown in the syntax of FIG. 13 is described in Index_List of FIG. 11B.

[0066] On the other hand, Audio Sector as shown in FIG. 11D is provided on each track as shown in FIG. 11C in the track area of FIG. 11A and Frame_Info as shown in the syntax of FIG. 14 is described in Audio Header in the Audio Sector. More specifically, Time_Code of each frame is described there as shown in FIG. 15.

[0067] As described above, according to the HD standards, only the time code (absolute time) of each frame can be read out from a track area that is a program area during an ordinary operation of reproducing data from a track unlike the CD format. In other words, information such as track numbers and the elapsed time of each track is not recorded. Therefore, it is not possible to display track numbers and the elapsed time of each track.

[0068] In order to overcome this inconvenience, the disk replaying apparatus 1 firstly reads out area TOC

(Table of Contents) data and stores it in memory 8 as shown in FIG. 1 when a disk is placed in position. Thus, the memory 8 stores a table of TRACK LIST 2 and INDEX LIST as shown in FIG. 16.

[0069] For driving the optical disk 2 for data reproduction and adding user data (U bit) to its digital output, Q data as shown in FIG. 17 has to be produced by additional information detector/processor 9 through a data conversion/generation process.

[0070] Now, a conversion processing operation of a sub-data will be described by referring to FIG. 18. Firstly, the time code (absolute time) of the audio header has to be read out as TCP for each frame while the optical disk 2 is driven for data reproduction. Then, in Step S1, the absolute time TCA (minute M, second S, frame F) of the TCP is written as shown in FIG. 17.

[0071] Then, in Step S2, Track_Start_Time_Code (TC2) of Track No. 2 (TNO. 2) is compared with the above TCP. If TCP is smaller than TC2, the operation proceeds to Step S3, where the current track number is specified as TNO. 1. In Step S4, TC1 of Track Number 1 (TNO. 1) is subtracted from the TCP to produce elapsed time TCN (minute, second, frame).

[0072] After Step S4, the operation proceeds to the processing sequence of *1 surrounded by broken lines in FIG. 18, where the index number (IDX) in the track number TNO. 1 is determined.

[0073] In Step S5, Index_Start_TC of INDEX 2 of the track number TNO. 1 in Index_List is compared with the above TCP. If the above TCP is smaller than Index_Start_TC of INDEX 2, the operation proceeds to Step S6, where the index number is determined to be equal to "1". If, on the other hand, it is found in Step S5 that the above TCP is greater than Index_Start_TC of INDEX 2, the operation proceeds to Step S7, where Index_Start_TC of INDEX 3 of the track number TNO. 1 is compared with the above TCP. If the above TCP is smaller than Index_Start_TC of INDEX 3, the operation proceeds to Step S8, where the index number is determined to be equal to "2". If, on the other hand, it is found in Step S7 that the above TCP is greater than Index_Start_TC of INDEX 3, the operation proceeds to Step S9, where Index_Start_TC of INDEXM of the track number TNO. 1 is compared with the above TCP. If the above TCP is smaller than Index_Start_TC of INDEXM, the operation proceeds to Step S10, where the index number is determined to be equal to "M-1". If, on the other hand, it is found in Step S9 that the above TCP is greater than Index_Start_TC of INDEXM, the operation proceeds to Step S11, where Index_Start_TC of INDEXM of the track number TNO. 1 is compared with the above TCP. If the above TCP is smaller than Index_Start_TC of INDEXM+1, the operation proceeds to Step S12, where the index number is determined to be equal to "M".

[0074] Then, the operation returns to Step S2 and if it is found in Step S2 that the above TCP is greater than the above TC2, the operation proceeds to Step S2,

where Track_Start_Time_Code (TC3) of Track Number 3 (TNO. 3) is compared with the above TCP. If the above TCP is smaller than TC3, the operation proceeds to Step S22, where the current track number TNO. is determined to be equal to "2". Then, in Step S23, TC2 of the track number TNO. 2 is subtracted from TCP to obtain the elapsed time TCN (minute, second, frame).

[0075] After the above Step S23, the operation proceeds to the processing sequence of *2 surrounded by broken lines, where the index number (IDX) in the track number TNO. 2 is determined. Since this sequence is similar to that of *1 above, it will not be described here any further.

[0076] Then, in Step S31, if the above TCP is smaller than TCN of the track number N (TNO. N), the operation proceeds to Step S32, where the current track number TNO. is determined to be equal to N-1. In Step S33, TC (N-1) of the track number TNO. (N-1) is subtracted from TCP to obtain the elapsed time TCN (minute, second, frame).

[0077] After the above Step S33, the operation proceeds to the processing sequence of *N-1 surrounded by broken lines, where the index number (IDX) in the track number TNO. N-1 is determined. Since this sequence is similar to that of *1 above, it will not be described here any further.

[0078] If it is found in Step S31 that the above TCP is greater than the N-th TCN of the track number TNO, the operation proceeds to Step S41, where Track_Start_Time_Code (TCN+1) of the track number N+1 (TNO. N+1) is compared with the above TCP. If it is found that TCP is smaller than TCN+1, the operation proceeds to Step S42, where the current track number TNO is determined to be equal to "N". Then, in Step S43, TCN of the track number N (TCN. N) is subtracted from TCP to obtain the elapsed time TCN (minute, second, frame).

[0079] After the above Step S43, the operation proceeds to the processing sequence of *N surrounded by broken lines, where the index number (IDX) in the track number TNO. N is determined. Since this sequence is similar to that of *1 above, it will not be described here any further.

[0080] Then, in the disk replaying apparatus 1, the sub-data converter/generator 9 turns TCP into absolute time TCA as shown in FIG. 18, using TCP read out by the additional information detector/processor 8 and the table stored in the memory 10 as shown in FIG. 16. Thereafter, the disk replaying apparatus 1 compares the track start time code of each track with TCP, starting from the track number TNO. 2. TNO of FIG. 17 that is greater than the N-th TC of the track number TNO and smaller than the N+1-th TC will be equal to N. The value obtained by subtracting the N-th TC of TNO from TCP represents the elapsed time of the track TCN (minute, second, frame) of FIG. 17. Then, each index start time code of TNO. N in the index list is compared with TCP to determine the current index number (IDX). Thus, Q data as shown in FIG. 17 can be prepared with the

above described flow of operation of conversion/generation. Then, fixed value data such as CONTROL and address ADA shown in FIG. 4 are added thereto to produce complete Q data.

[0081] If the current absolute time is 7 minute, 40 second, 33 frame in the list of area TOC shown in FIG. 16, then the track number TNO will be "2" and the elapsed time TCN will be 2 minute, 10 second, frame 33, whereas IDX will be "2".

[0082] Now, the operation of the above embodiment will be described further by referring to the flow chart of FIG. 18 and also to FIG. 19.

[0083] Firstly, TCP "7 minute, 40 second, 33 frame" as read out by the additional information detector/processor 9 is written into TCA of FIG. 17. Then, Track_Start_Time_Code (TC2) "5 minute, 30 second, 00 frame" of the track with the track number 2 (TNO. 2) is compared with the above TCP. Since TCP is greater than TC2, the operation proceeds to Step S21, where Track_Start_Time_Code (TC3) "11 minute, 40 second, 00 frame" of the track with the track number 3 (TNO. 3) is compared with the above TCP. Since TCP is smaller than TC3, the operation proceeds to Step S22, where the track number TNO is made equal to "2". Then, in Step S23, TC2 is subtracted from TCP to obtain 2 minutes, 10 seconds, 33 frames as TCN, or the elapsed time of the track number 2.

[0084] Also, "6 minute, 10 second, 00 frame" of INDEX 2 is compared with the above TCP and, since TCP is greater of the two, TC "8 minute, 10 second, 00 frame" of INDEX 3 is compared with the above TCP. Since TCP is smaller of the two, the index number will be made equal to "2".

[0085] Thus, to convert the additional information read out from the optical disk 2 by means of the optical pickup 3 of the disk replaying apparatus 1 into data corresponding to Q code of the sub-data of a CD, the data of the area TOC is read out by the additional information detector/processor 8 firstly when the disk is placed in position and stored in the memory 2. For an ordinary track replaying operation, the time code in the header is read out by the additional information detector/processor 8 and converted into channel status data and user data Q code equivalent to that of CDs by the user data converter/generator 9, referring to the information on the track list in the area TOC data stored in the memory 10.

[0086] Thus, the conventional digital recorder that receives the digital interface output by way of the output terminal 11 identifies the CD category by decoding the channel status data and detects the sub-data of the CD including the track number and the elapsed time by decoding the Q code of the user data. Then, it automatically records the start Id and the track number corresponding to the detected data on the recording medium to a great advantage for the operation of the digital recorder.

[0087] For example, the value obtained by subtracting the start address of the N-th address in the track list from

the time code address being reproduced will correspond to the elapsed time on the track.

[0088] Note that channel status data is more often than not uniquely defined by the category and the parameters of the equipment to be used. For example, channel status data can be generated for a new optical disk by fixing the category code to CD, the sampling frequency to 44.1 KHz and the emphasis to off.

[0089] This operation of the present invention will be briefly discussed by referring to FIG. 10.

[0090] Firstly, in Step 101, it is determined if the CD layer or the HD layer of the mounted optical disk that is to be replayed. If it is determined in Step 101 that the CD layer is specified by the user for replaying, the operation proceeds to Step 102, where the TOC area of the CD layer is replayed firstly to access the program area and retrieve the necessary data therefrom on the basis of the obtained TOC information. Then, in Step 103, the sub-data annexed to the main data of the digital audio signal reproduced from the program area in Step 102. If, on the other hand, it is determined in Step 101 that the HD layer is specified by the user for replaying, the operation proceeds to Step 105, where the TOC area of the CD layer is replayed firstly and then, in Step 106, the area TOC information is stored in the memory. In Step 107, the program area is accessed and the necessary data is retrieved therefrom on the basis of the obtained control information on the area TOC. Then, in Step 108, the program number and the passed-by addresses of the program being replayed are generated on the basis of the recording addresses expressed in terms of absolute addresses of each program stored in the memory and the absolute addresses reproduced from said program area.

[0091] Thereafter, in Step 109, the first switch and the second switch of FIG. 1 are turned to the HD side under the control of the control section. While the flow chart of FIG. 20 is described above in terms of a multi-layer disk, the flow chart applies to the use of a CD and an HD disk by modifying Step 101 to determine if the CD or the HD disk is to be replayed.

[0092] With the above described method, the additional information of a novel optical disk can be converted into channel status data and user data equivalent to those of a CD, which can then be used as digital audio interface output.

[0093] While a multi-bit digital signal of 16 bits with a sampling frequency of fs (Hz) conforming to the existing CD standards and output from the digital interface output section is produced and stored in some other recording medium in the above embodiment, it may alternatively be so arranged that a piece of music is divided on the basis of the sub-data including channel status data and user data output from the sub-data converter/generator 9 when the 1-bit digital audio signal sampled with a sampling frequency of fs multiplied by 64 ($64 \times 44.1 \text{ KHz} = 2,8224 \text{ MHz}$) and output from the audio signal output section 6 in FIG. 1 is recorded on some other

recording medium.

[0094] Thus, according to the present invention, when replaying a disk storing digital audio signals recorded according to an HD system that is different from the CD system, the additional information including the track number and the elapsed time of each piece of music are detected and converted into data equivalent to channel status data and user data conforming to the CD standards for the digital audio interface, which data are then output to the digital interface output. With this arrangement, the advantage of automatically recording the start IDs and the track numbers on the recording medium can also be made available when recording a digital recorder such as DAT or mini-disk.

Claims

1. A reproduction apparatus adapted to selectively replaying a first recording medium having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers; and

a second recording medium having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area;
said reproduction apparatus comprising:

a reproduction means for replaying the control area and the program area of said second recording medium;

a memory means for storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second recording medium and replayed by said reproduction means;
a sub-data generation means for generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second recording medium by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and

an interface output means for receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first recording medium when replaying said first recording medium and receiving the passed-by addresses

and the program number of the program currently being reproduced as generated by said sub-data generation means, transforming them and outputting them to a predetermined digital interface when replaying said second recording medium.

2. A reproduction apparatus adapted to selectively replaying a first layer having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers and a second layer having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area;
said reproduction apparatus comprising:

a reproduction means for selectively replaying the program area of said first layer and the control area and the program area of said second layer;

a memory means for storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second layer and replayed by said reproduction means;

a sub-data generation means for generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second layer by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and

an interface output means for receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first layer when replaying said first layer and receiving the passed-by addresses and the program number of the program currently being reproduced as generated by said sub-data generation means, transforming them and outputting them to a predetermined digital interface when replaying said second layer.

3. A reproduction apparatus according to claim 1 or 2, wherein said first format is that of a digital signal sampled with a sampling frequency of F_s and having a quantization bit number of m , where m is an integer greater than or equal to 2.

4. A reproduction apparatus according to claim 3, wherein said second format is that of a digital signal sampled with a sampling frequency of F_s multiplied by n , where n is an integer greater than or equal to 2 and having a quantization bit number of 1 bit. 5
5. A reproduction apparatus according to any one of the preceding claims, further comprising a conversion means for converting the program in the program area of the second format into a program of the first format. 10
6. A reproduction apparatus according to any one of the preceding claims, wherein said digital interface conforms to the IEC 958 Standards. 15
7. A reproduction method for selectively replaying a first recording medium having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers; and 20
 - a second recording medium having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area; 25
 - said reproduction method comprising:

a replaying step of replaying the control area and the program area of said second recording medium; 35

a storing step of storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second recording medium and replayed by said reproduction means; 40

a sub-data generating step of generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second recording medium by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and 45

an interface output step of receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first recording medium when replaying said first recording medium and receiving the passed-by addresses and the program number of the program currently being reproduced as generated by said 50

sub-data generation means, transforming them and outputting them to a predetermined digital interface when replaying said second recording medium.


8. A reproduction method for selectively replaying a first layer having a program area storing a plurality of programs formatted according to a first format and sub-data including at least the passed-by addresses of each program and the program numbers and a second layer having a program area storing a plurality of programs formatted according to a second format different from said first format and sub-data accompanying said programs and including absolute addresses and a control area for controlling recording addresses expressed in terms of absolute addresses and corresponding the programs stored in said program area; 55
- said reproduction method comprising:

a replaying step of selectively replaying the program area of said first layer and the control area and the program area of said second layer;

a storing step of storing recording addresses expressed in terms of absolute addresses and corresponding to the programs recorded in the control area of said second layer and replayed by said reproduction means;

a sub-data generating step of generating the program number and the passed-by addresses of the program currently being reproduced on the basis of the absolute addresses reproduced from the program area of said second layer by the recording addresses as expressed in terms of absolute addresses and corresponding to the programs stored in said memory means and also by said reproduction means; and

an interface output step of receiving as input the passed-by addresses and the program number of each of the programs reproduced from the program area of said first layer when replaying said first layer and receiving the passed-by addresses and the program number of the program currently being reproduced as generated by said sub-data generation means, transforming them and outputting them to a predetermined digital interface when replaying said second layer.

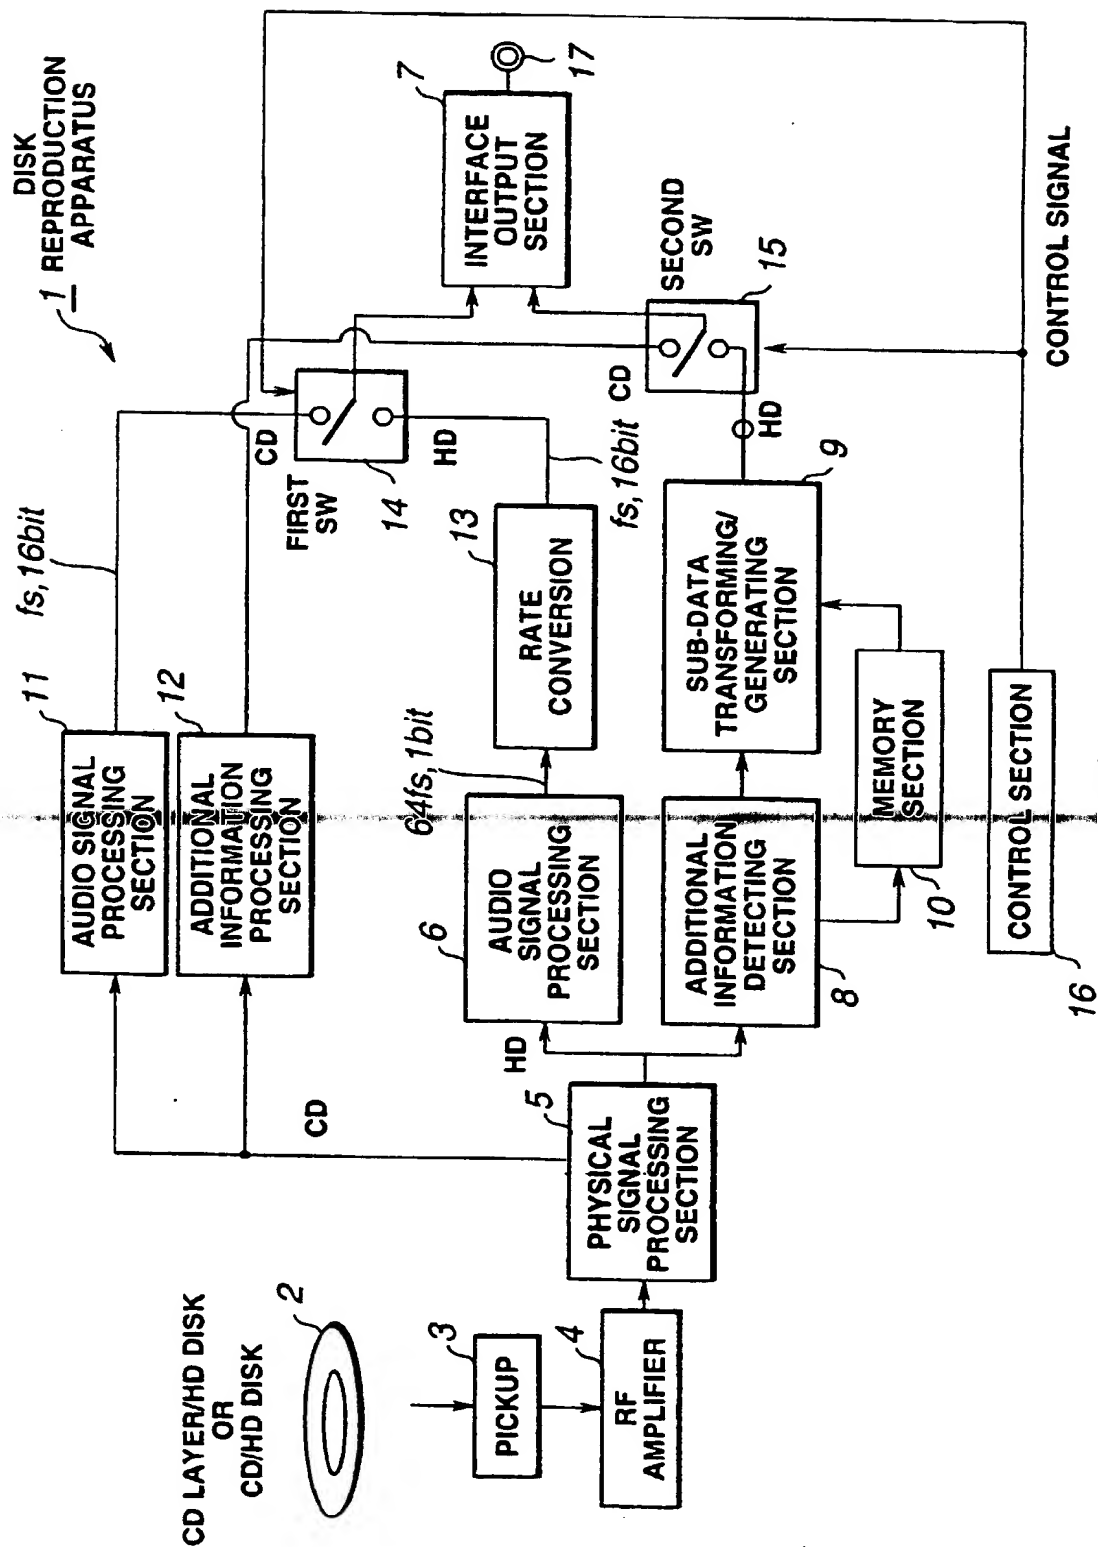

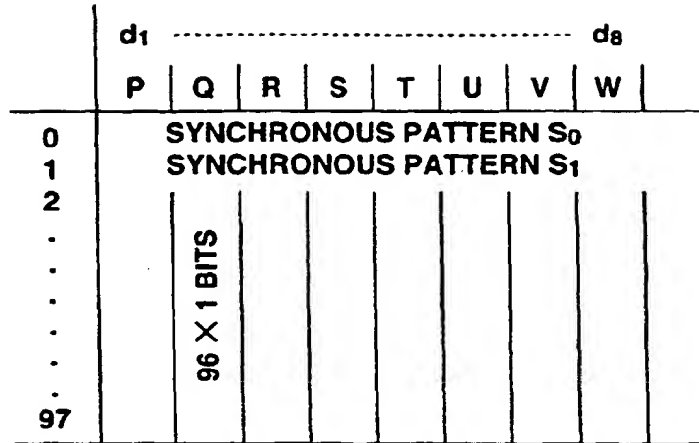


FIG.2

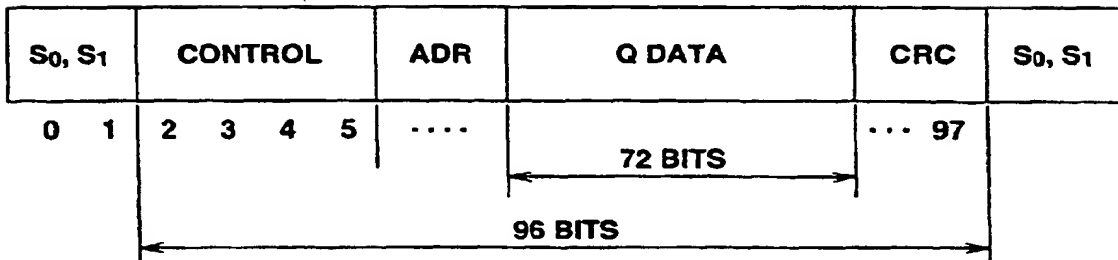


FIG.3

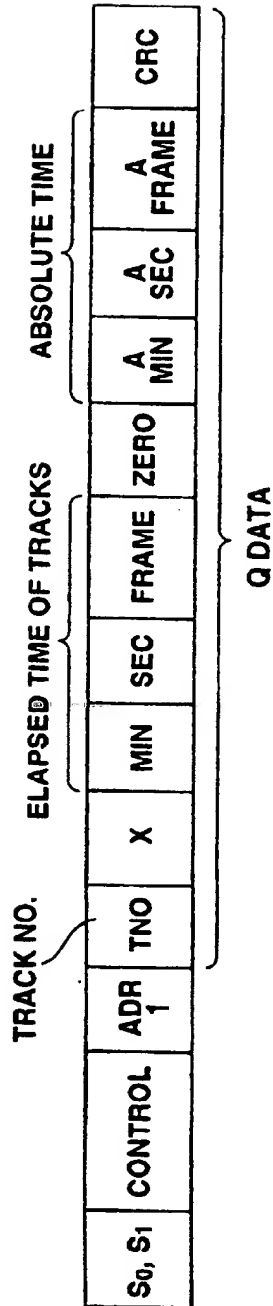


FIG. 4

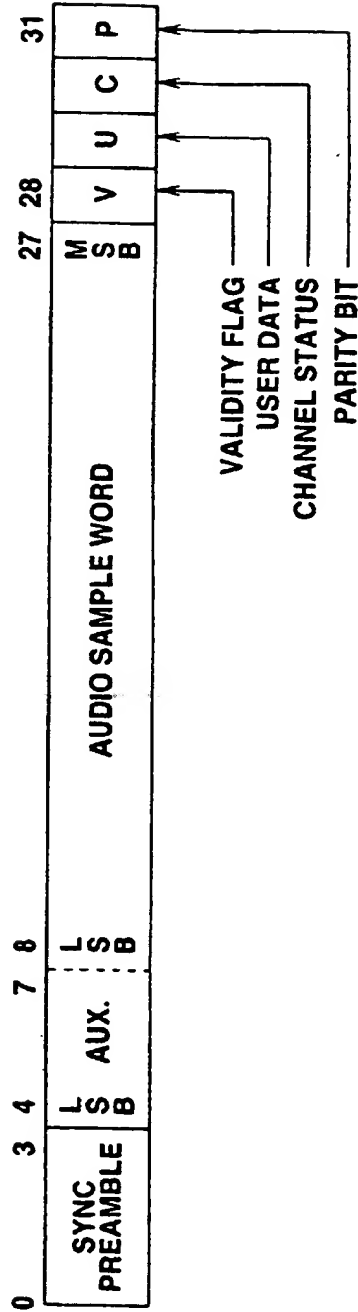


FIG. 5

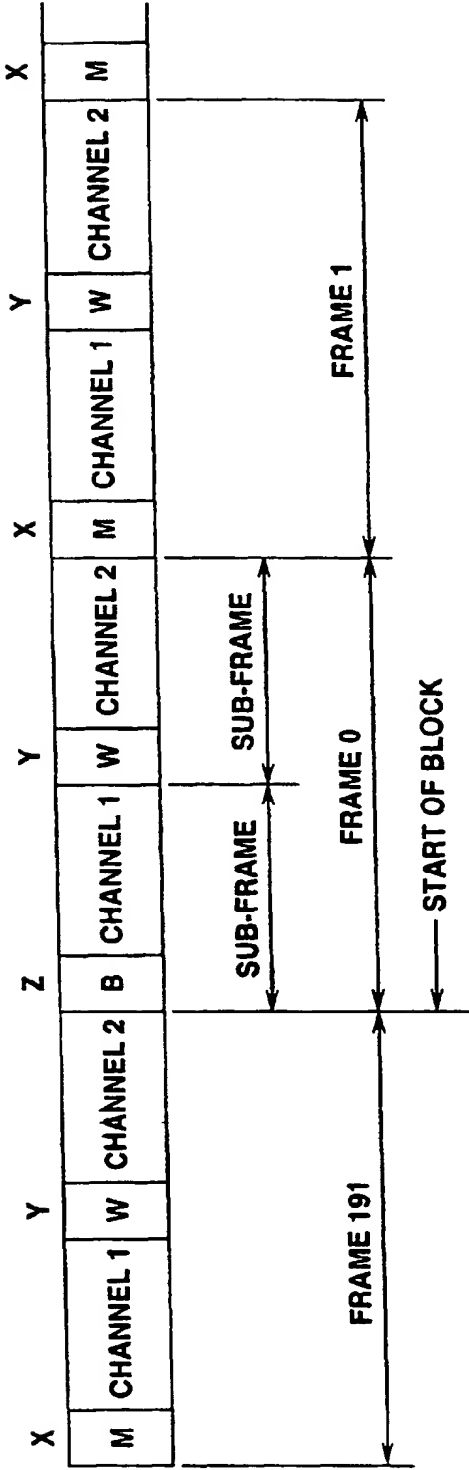


FIG.6

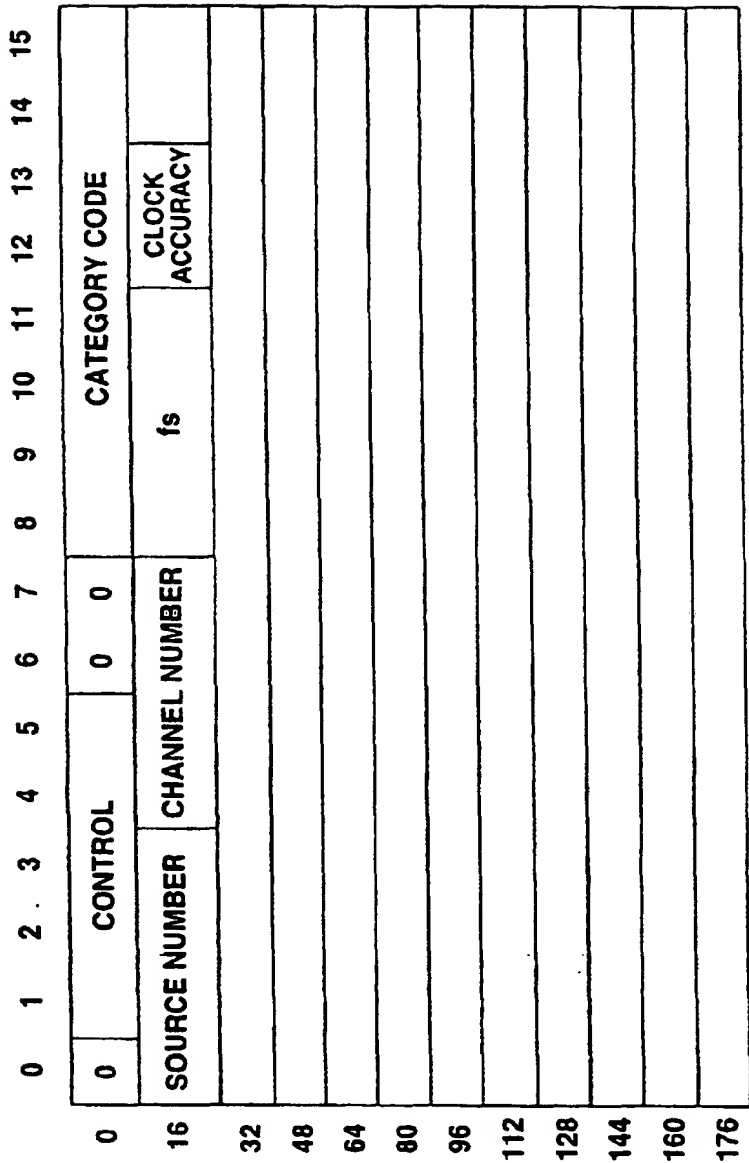


FIG.7

	0	1	2	3	4	5	6	7	8	9	10	11
0	0	0	0	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0	0	0	0
24	1	Q1	R1	S1	T1	U1	V1	W1	0	0	0	0
36	1	Q2	R2	S2	T2	U2	V2	W2	0	0	0	0

1164	1	Q96	R96	S96	T96	U96	V96	W96	0	0	0	0
0	0	0	0	0	0	0	0	0	0	0	0	0
12	0	0	0	0	0	0	0	0	0	0	0	0
24	1	Q1	R1	S1	T1	U1	V1	W1	1	Q2	R2	S2
36	T2	U2	V2	W2	0	0	0	0	0	0	0	0
48	1	Q3	R3	S3	T3	U3	V3	W3	0	0	0	0
60	0	0	0	0	1	Q4	R4	S4	T4	U4	V4	W4
72	1	Q5	R5	S5	T5	U5	V5	W5	0	0	0	0


FIG.8

No.	PREAMBLE SYNC	AUX	AUDIO SAMPLES				M S B	V	U	C	P
1	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1L	P
2	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C1R	P
3	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2L	P
4	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C2R	P
5	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3L	P
6	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C3R	P
7	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4L	P
8	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C4R	P
9	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5L	P
10	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C5R	P
11	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6L	P
12	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C6R	P
13	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7L	P
14	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C7R	P
15	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8L	P
16	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C8R	P
17	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9L	P
18	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C9R	P
19	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10L	P
20	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C10R	P
21	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11L	P
22	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C11R	P
23	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12L	P
24	B	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C12R	P

FIG.9

No.	PREAMBLE SYNC	AUX	AUDIO SAMPLES				M S B	V	U	C	P
25	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C13L	P
26	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q1	C13R	P
27	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R1	C14L	P
28	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S1	C14R	P
29	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T1	C15L	P
30	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U1	C15R	P
31	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V1	C16L	P
32	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W1	C16R	P
33	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17L	P
34	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C17R	P
35	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18L	P
36	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C18R	P
37	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	1	C19L	P
38	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	Q2	C19R	P
39	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	R2	C20L	P
40	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	S2	C20R	P
41	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	T2	C21L	P
42	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	U2	C21R	P
43	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	V2	C22L	P
44	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	W2	C22R	P
45	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23L	P
46	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C23R	P
47	M	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24L	P
48	W	0000	0000	XXXX	XXXX	XXXX	XXXX	0	0	C24R	P

FIG.10

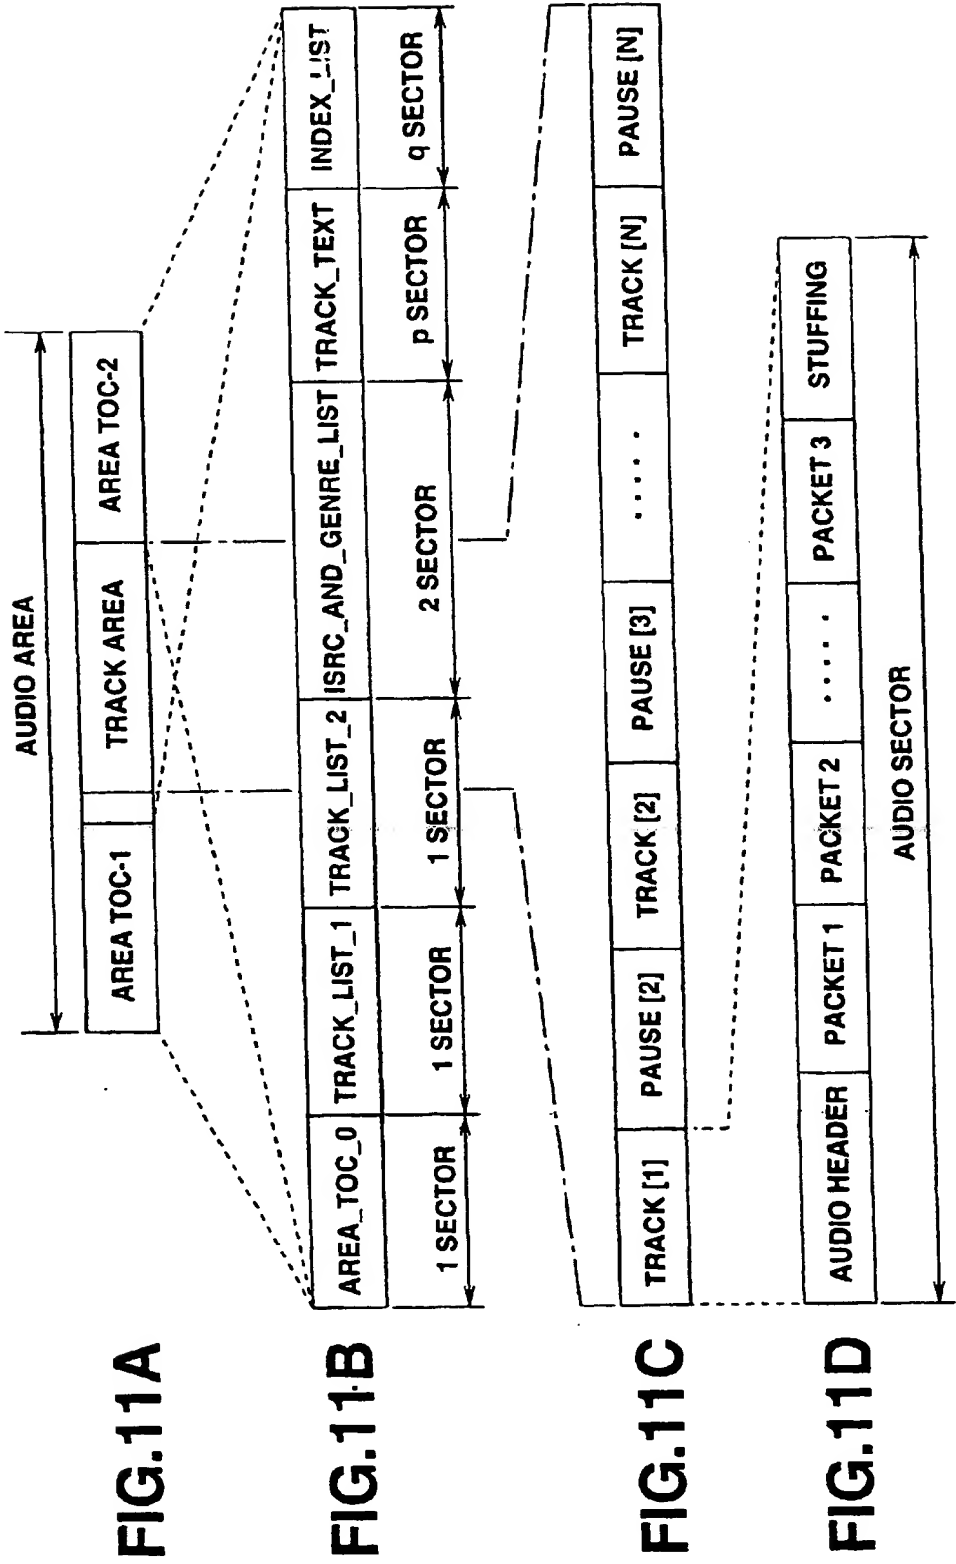

	#bytes	format	value
Track_List_2() { Track_List_2_Signature for (ton=1;ton<=N_Tracks;ton++) { Track_Start_Time_Code [ton] reserved } Reserved for (ton=1;ton<=N_Tracks;ton++) { Track_Time_Length [ton] Track_Flags [ton] } Reserved }	8	string	"SACDTRL2"
	3	Time_Code	
	1	UInt8	0
	Until 1028	UInt8	0
	3	Time_Code	
	1	Track_Flags	
	Until 2048	UInt8	0

FIG.12

	#bytes	format	value
Index_List () { Index_List_Slgnature for (ton=1;ton<=N_Tracks;ton++) { Index_Ptr [ton] } Reserved for (ton=1;ton<=N_Tracks;ton++) if (Index_Ptr [ton]>0) { N_Stored_Indexes [ton] for (x=1;x<=N_Stored_Indexes [ton];x++) { Index_Start_TC [ton] [x+1] } } Reserved }	8	string	"SACD_Ind"
	2	UInt16	
	Until 524	UInt8	0
	1	UInt8	1..255
	3	Time_Code	
	Until eos	UInt8	0

FIG.13

	#bytes	format	value
Audio_Header () {			
N_Packs	3	UInt3	1..7
N_Frame_Starts	3	UInt3	1..7
Reserved	2		0
for (p=1;p<=N_Packets;p++)			
Packet_Info () [p]	16	Packet_Info	
for (f=1;f<=N_Frame_Starts;f++)			
Frame_Info () [f]	48	Frame/Info	
}			

FIG.14

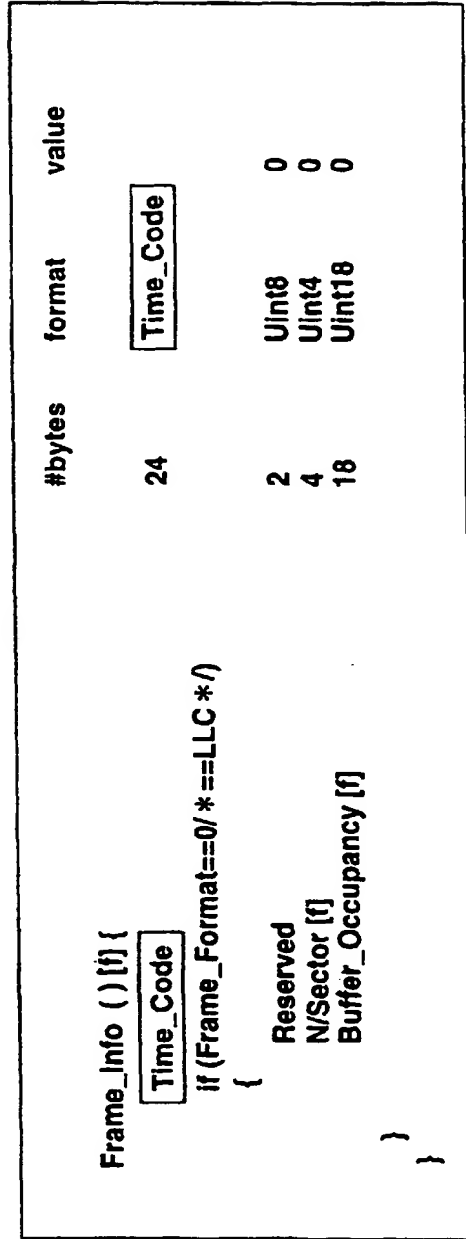


FIG.15

AREA TOC						
TRACK LIST2			INDEX LIST			
TRACK START TIME CODE	TN01	0M10S00F (TC ₁)	INDEX 2	2M10S00F	INDEX START TIME CODE	
			INDEX 3	3M10S00F		
				
			INDEX M	4M10S00F		
	TN02	5M30S00F (TC ₂)	INDEX 2	6M10S00F		
		INDEX 3	8M10S00F	
TN03	10M20S00F (TC ₃)	INDEX 2	12M30S00F			
TN0N	(TC _N)			

FIG.16

TNO	INDEX	N MIN	N SEC	N FRAME	ZERO	A MIN	A SEC	A FRAME		
TRACK NO. TNO		INDEX NO. IDX		ELAPSED TIME OF TRACK TCN(M, S, F)			UNIFORM 0		ABSOLUTE TIME TAC(M, S, F)	

FIG.17

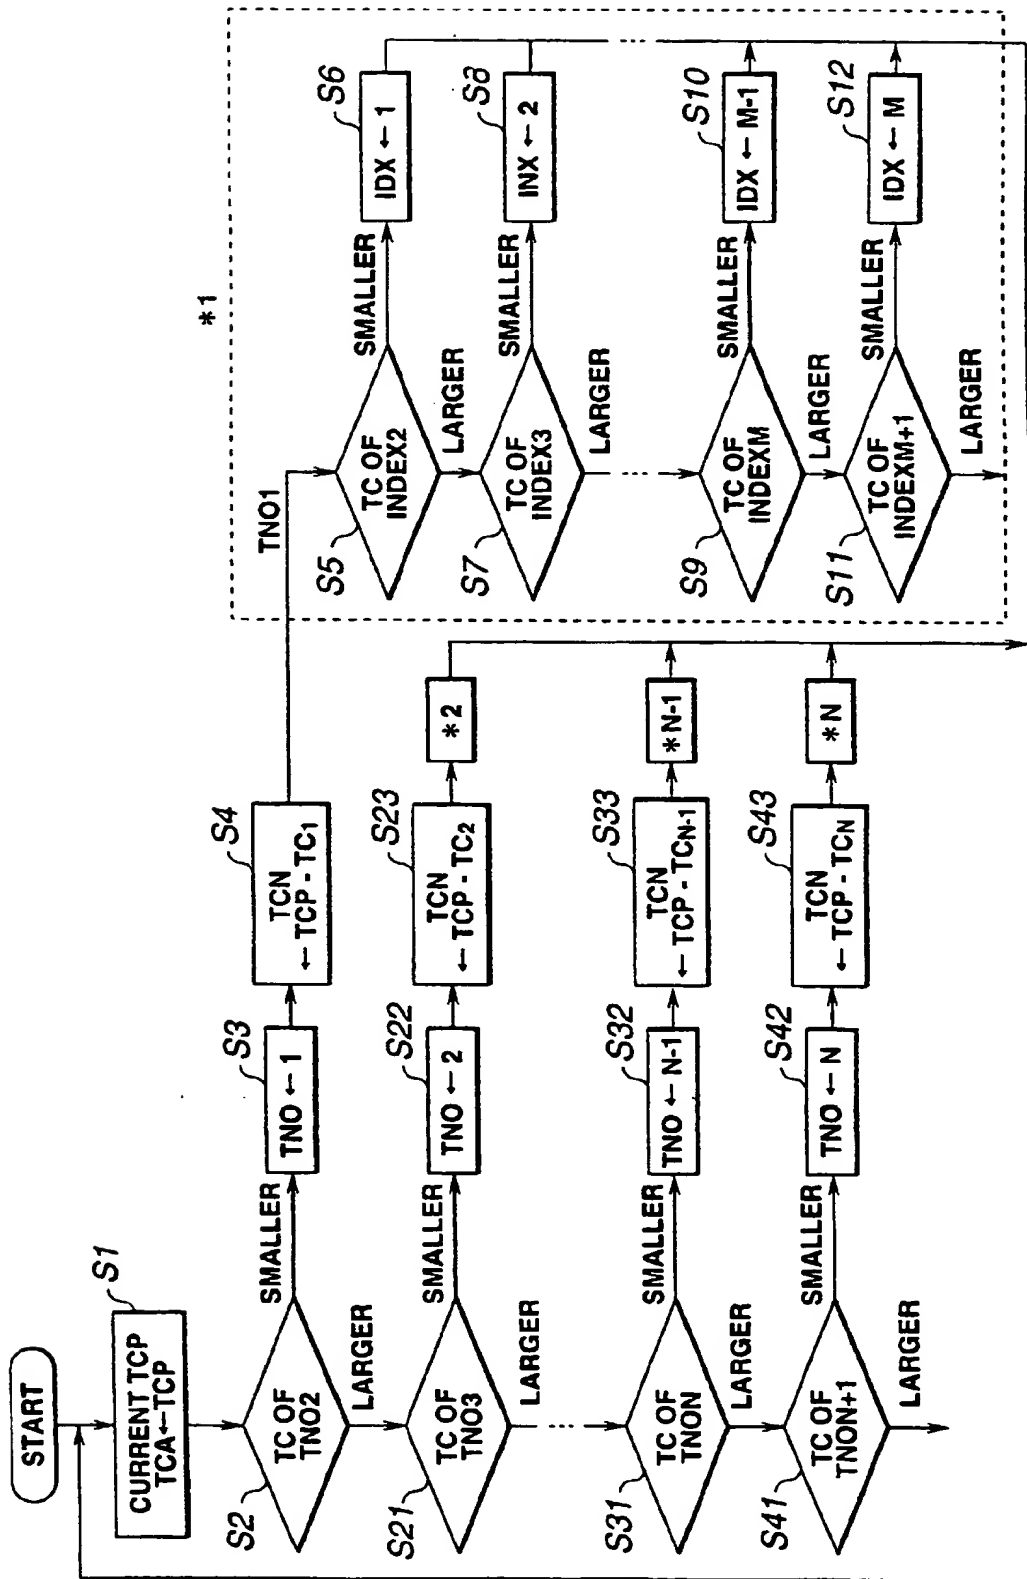


FIG.18

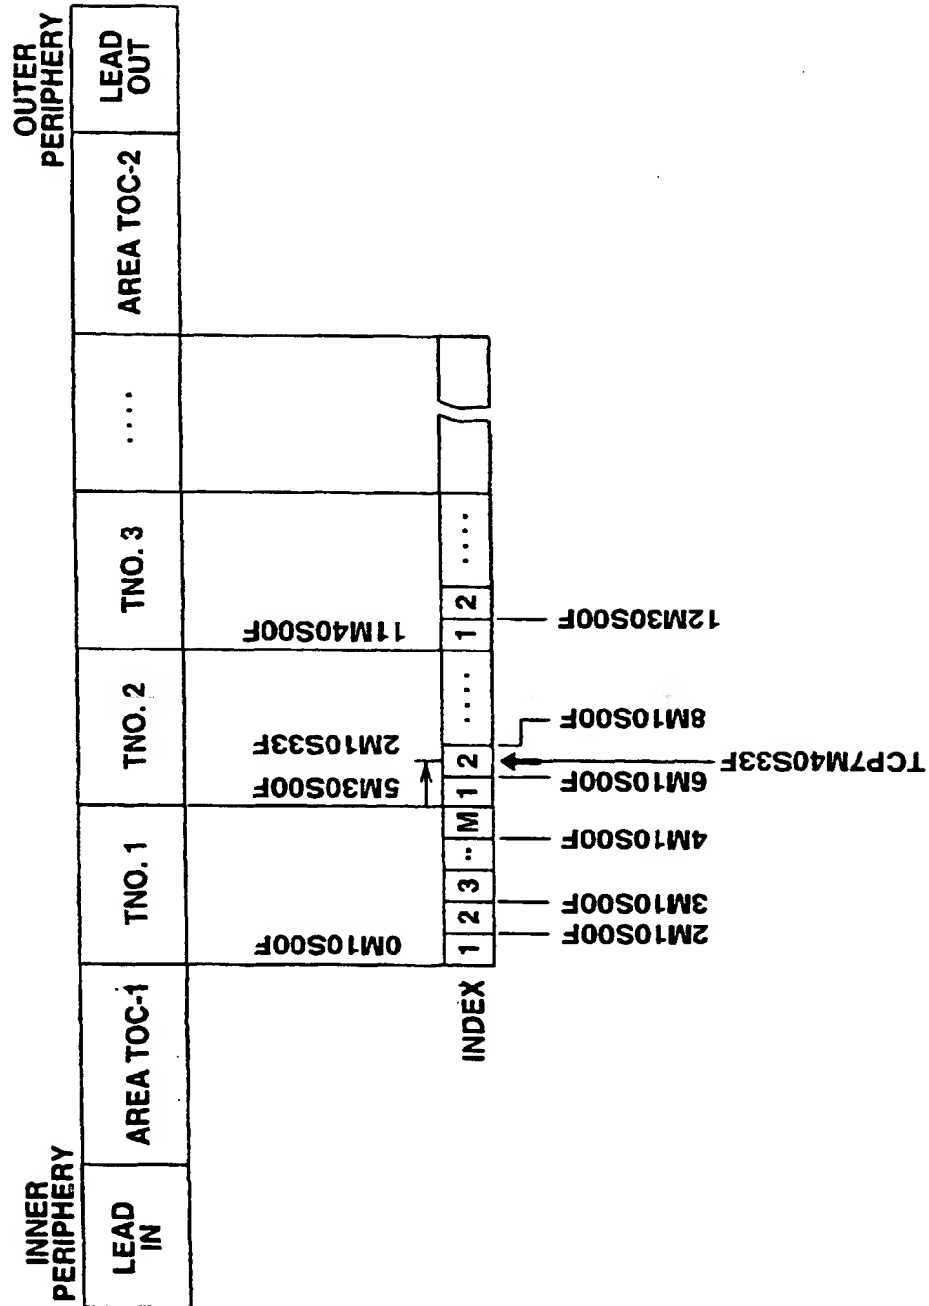


FIG.19


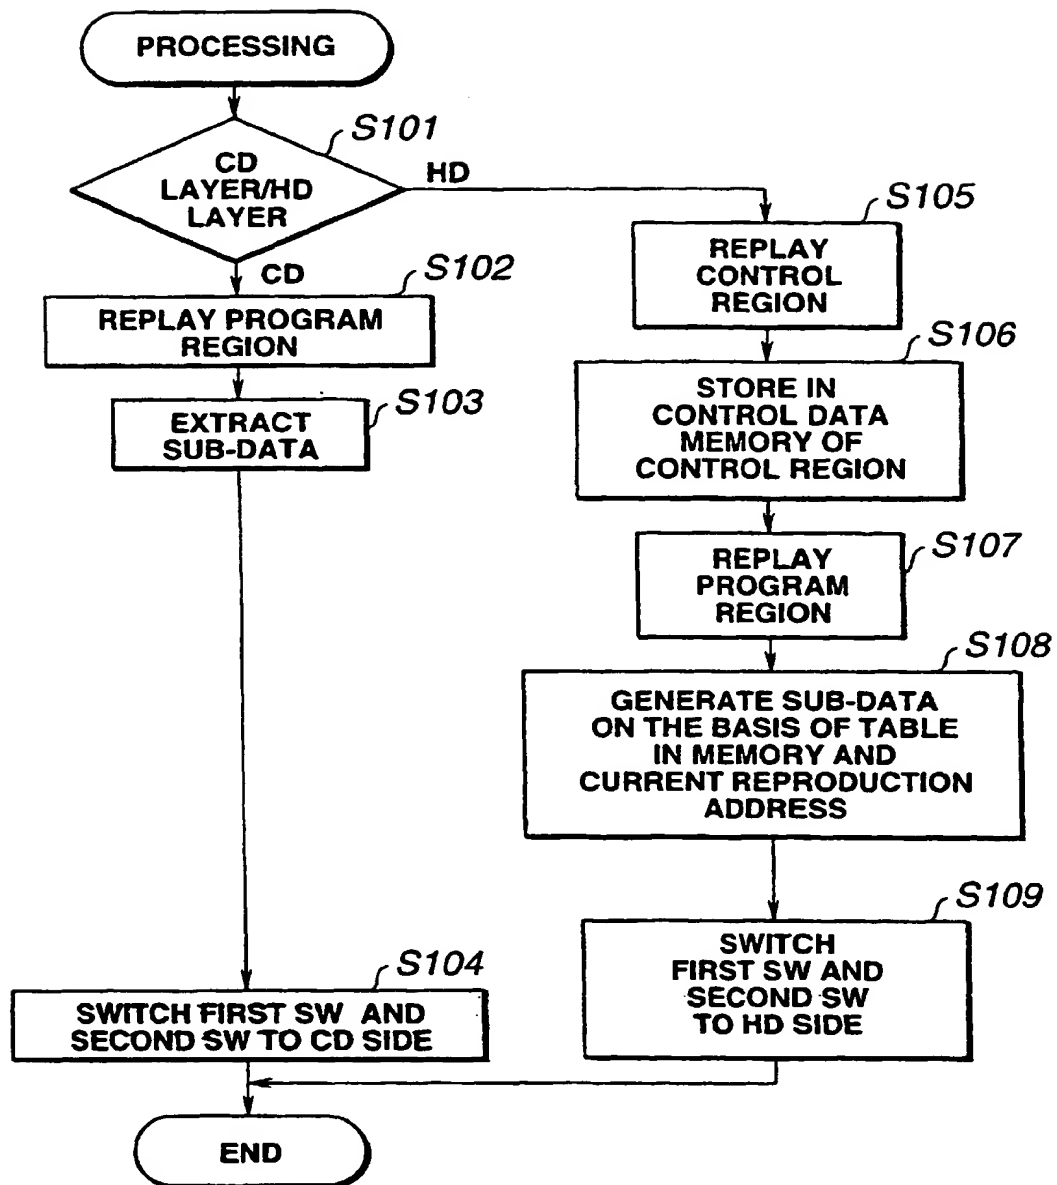


FIG.20

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 987 711 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
07.05.2003 Bulletin 2003/19

(51) Int Cl.7: **G11B 27/28**

(43) Date of publication A2:
22.03.2000 Bulletin 2000/12

(21) Application number: 99307399.8

(22) Date of filing: 17.09.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Sekii, Yasuaki, c/o Sony Corp.
Tokyo (JP)**

(74) Representative: **Ayers, Martyn Lewis Stanley
J.A. KEMP & CO.,
14 South Square,
Gray's Inn
London WC1R 5JJ (GB)**

(30) Priority: 18.09.1998 JP 26527898

(71) Applicant: **SONY CORPORATION
Tokyo (JP)**

(54) **Reproduction method and reproduction apparatus**

(57) This application relates to a reproduction method and also to a reproduction apparatus adapted to transmit a first digital signal (CD) for main data of a piece of music and additional data accompanying the main data

and including the number of the piece of music and the elapsed time on the track and a second digital signal (HD) for main data of the piece of music and accompanying absolute time data on a common digital interface (7).

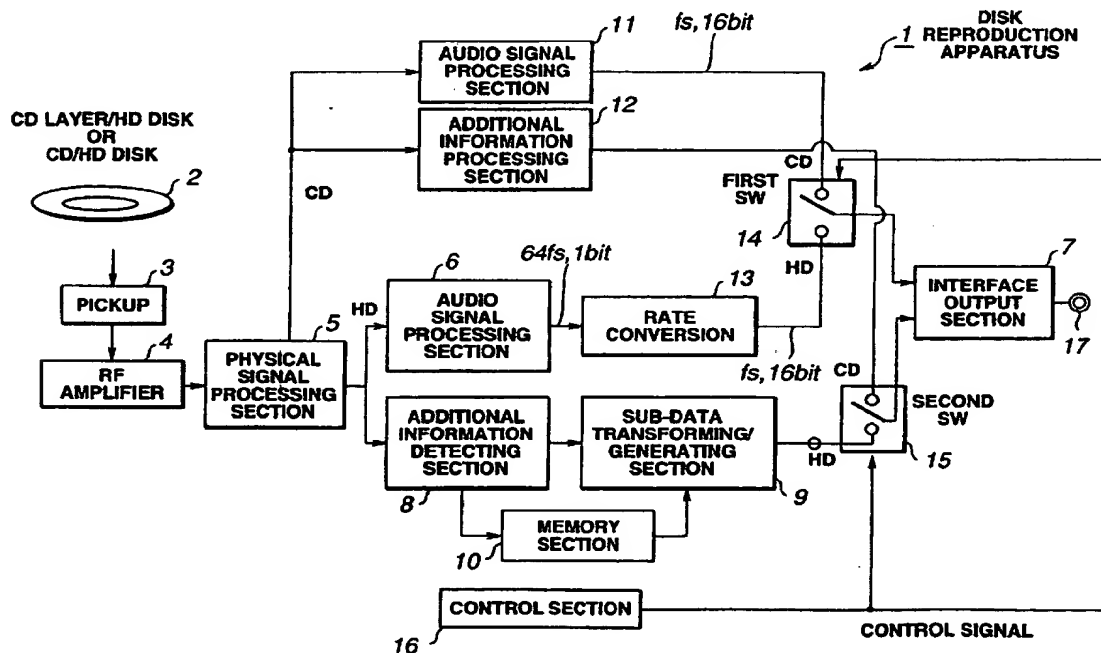


FIG.1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 7399

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 718 845 A (SONY CORP) 26 June 1996 (1996-06-26) * column 6, line 11 - column 14, line 51; figures *	1-8	G11B27/28
A	EP 0 406 021 A (SHARP KK) 2 January 1991 (1991-01-02) * page 6, line 26 - page 9, line 32 *	1-8	
A	EP 0 715 301 A (SONY CORP) 5 June 1996 (1996-06-05) * column 1, line 3 - column 2, line 19; figures 1,3,5 *		
A	US 5 570 340 A (LEE DEOK-HYUN ET AL) 29 October 1996 (1996-10-29) * column 2, line 10 - column 3, line 10; figures 1-10 *	1-8	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G11B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 12 March 2003	Examiner D'Attilia, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 7399

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0718845 A	26-06-1996	AT 206238 T	15-10-2001
		AU 692961 B2	18-06-1998
		AU 4038895 A	27-06-1996
		BR 9505999 A	23-12-1997
		CA 2164801 A1	23-06-1996
		CN 1135633 A ,B	13-11-1996
		DE 69522917 D1	31-10-2001
		DE 69522917 T2	28-03-2002
		EP 0718845 A2	26-06-1996
		ES 2163469 T3	01-02-2002
		JP 8227577 A	03-09-1996
		PL 312001 A1	24-06-1996
		PL 179603 B1	31-10-2000
		RU 2162252 C2	20-01-2001
		SG 38892 A1	17-04-1997
		TR 960597 A2	21-07-1996
		US 5754521 A	19-05-1998
		US 5768252 A	16-06-1998
EP 0406021 A	02-01-1991	JP 1969454 C	18-09-1995
		JP 3035476 A	15-02-1991
		JP 6105536 B	21-12-1994
		JP 3035471 A	15-02-1991
		JP 1933662 C	26-05-1995
		JP 3035475 A	15-02-1991
		JP 6064841 B	22-08-1994
		JP 3035479 A	15-02-1991
		JP 3035480 A	15-02-1991
		JP 3066086 A	20-03-1991
		CA 2020059 A1	31-12-1990
		DE 69028880 D1	21-11-1996
		EP 0406021 A2	02-01-1991
		KR 9401016 B1	08-02-1994
		US 5420838 A	30-05-1995
EP 0715301 A	05-06-1996	AT 189076 T	15-02-2000
		AU 3914895 A	06-06-1996
		BR 9505603 A	04-11-1997
		CA 2164081 A1	31-05-1996
		CN 1135632 A	13-11-1996
		DE 69514630 D1	24-02-2000
		DE 69514630 T2	31-05-2000
		EP 0715301 A2	05-06-1996
		ES 2140628 T3	01-03-2000
		JP 8212561 A	20-08-1996
		US 6424614 B1	23-07-2002

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 7399

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-03-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5570340 A	29-10-1996	KR 9710529 B1	26-06-1997
		KR 9710530 B1	26-06-1997
		KR 9710531 B1	26-06-1997
		KR 9710532 B1	26-06-1997
		CN 1115089 A ,B	17-01-1996
		JP 3235706 B2	04-12-2001
		JP 8007486 A	12-01-1996
		NL 1000467 C2	01-03-1996
		NL 1000467 A1	01-12-1995

EPO FORM P458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82